
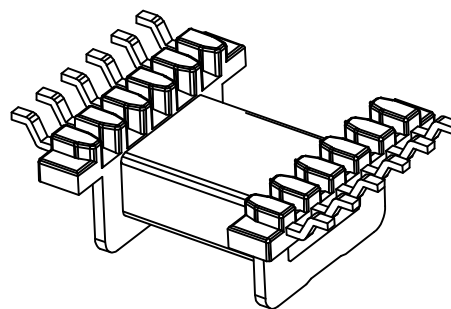
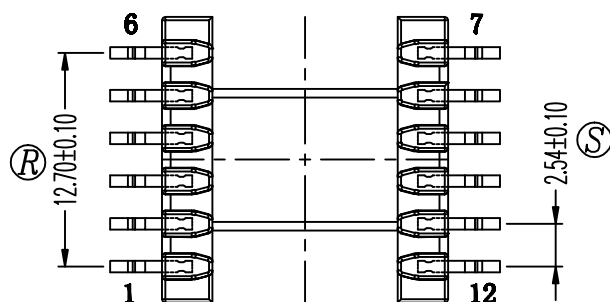
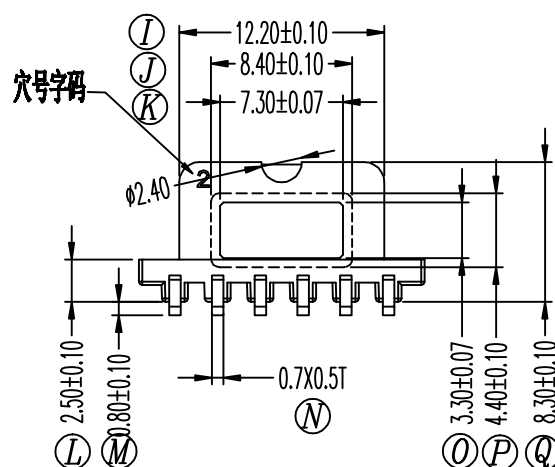
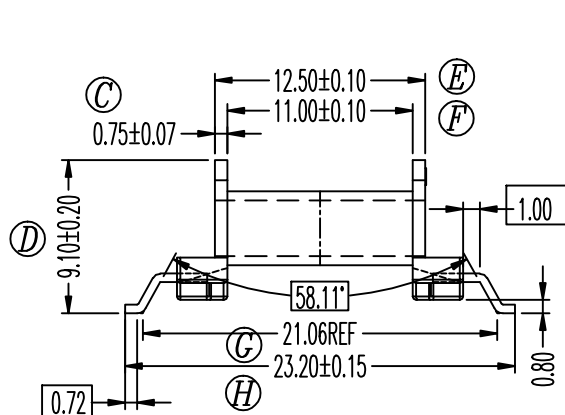
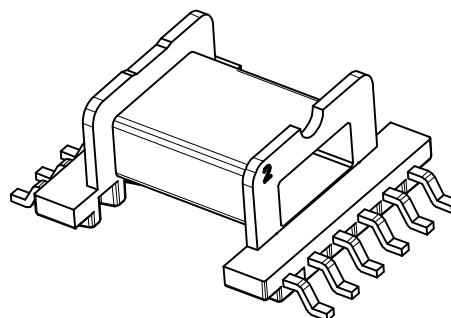


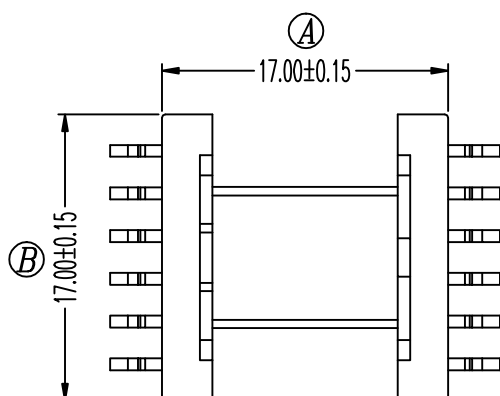

附注:

1. 未注圆角为R0.05-0.2MM;
2. 最大毛边允许0.05MM;
3. 端子平面度: 0.1MM MAX;
4. 产品符合ROHS环保要求;
5. 端子硬度为全硬 (1H)HV 190-210;
6. 镀层顺序及厚度, 镍 $\geq 1.27\mu\text{M}$;锡 $\geq 5\mu\text{M}$;
7. 切脚后断面须镀锡;
8. 整模产品线轴结合线不可有毛刺;
9. 各穴号间中孔尺寸相差不可超过 0.02;
10. 一模10穴

REV	DATE	REVISIONS REC

FuXun

东莞市福訊塑膠制品有限公司

DONGGUAN FU XUN PLASTICS PRODUCTS CO., LTD

地址：東莞市橫瀝鎮三江工業區116棟

TEL: 0769-82218739 82218769 FAX: 0769-82218929

DRAFTER	ZHONG FANG GENG
---------	-----------------

TOLERANCE

DATE: 2019.12.07

CHECK	WANG
-------	------

WANG

$4L \leq 16$	± 0.2
--------------	-----------

APPROVED	ZHU DONG SHENG
----------	----------------

ZHU DONG SHENG

16L≤50	±0.3
PIN PITCH	±0.2

DRAWING TITLE:

EFD-17

TERMINAL DIMENTION:

ANGLE:

+1°

MODEL NAME:

FX-S-1701-1

TERMINAL MATERIAL:

C5191 1H

UNIT:

XVIII

SPECIFICATION:

6+6 PIN

	UL RATING:
--	-------------------

94V-0

	SCALE
--	--------------

1 : 1

BOBBING MATERIAL:

PM9630(黑色)

	PULLING STRENGTH:
--	--------------------------

1KG/MIN

REV:	
------	--

A/0