


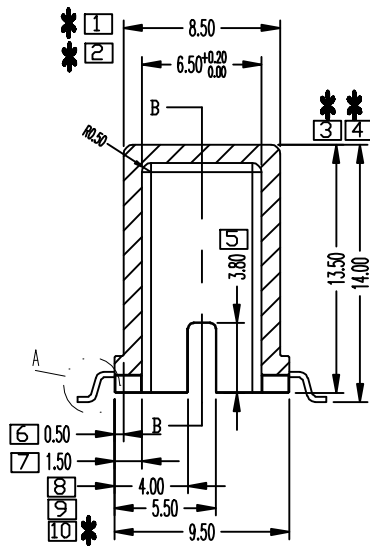

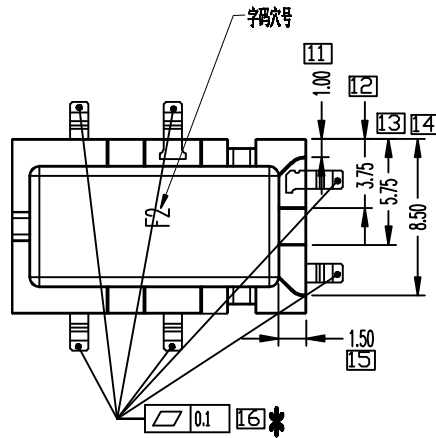



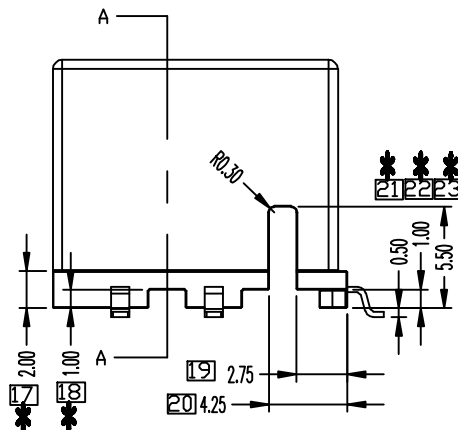

SECTION A-A

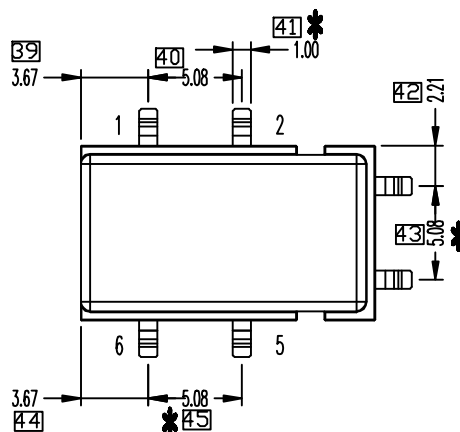

SECTION B-B



备注:

1. 未注圆角为R0.05-0.2mm;
2. 最大毛边允许0.05mm;
3. 产品符合ROHS环保要求;
4. 镀层顺序及厚度, NI1.27-2.54um; SN8-10um;
5. 最小壁厚1mm;
6. "*"尺寸为必检尺寸;
7. 未标公差按照ISO2768管控。

REV	DATE	REVISIONS REC



东莞市福讯达塑胶制品有限公司
DONGGUAN FU XUN DA PLASTICS PRODUCTS CO., LTD
 地址: 东莞市横沥镇三江工业区116栋
 TEL: 0769-82218739 82218760 FAX: 0769-82218629

DRAFTER	ZHANG SHAO YONG	公差按照ISO2768	DATE:	2021.08.02
CHECK	WANG	0.1<=3 ±0.05		
		3.1<=6 ±0.06		
		6.1<=30 ±0.10		
APPROVED	ZHU DONG SHENG	PIN PITCH ±0.2		

DRAWING TITLE:	CASE	TERMINAL DIMENTION:	端子	ANGLE:	±1°
MODEL NAME:	FX-S-CASE006	TERMINAL MATERIAL:	C5191R-H	UNIT:	mm
SPECIFICATION:	6 PIN	UL RATING:	94V-0	SCALE:	1 : 1
BOBBING MATERIAL:	LCP E4008	PULLING STRENGTH:	1.0Kg/MIN	REV:	A/0